

A2V Series

High Temperature 2 Socket MIL-Style, Right Angle, PPS Molded Connector, Permanent Mount, 392 °F (200 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



Product Features

High Temperature Resistance up to 392 °F (200 °C)

- ▶ 2 Socket Connection for use with CTC Standard & Compact Size, Top Exit, Single Axis Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

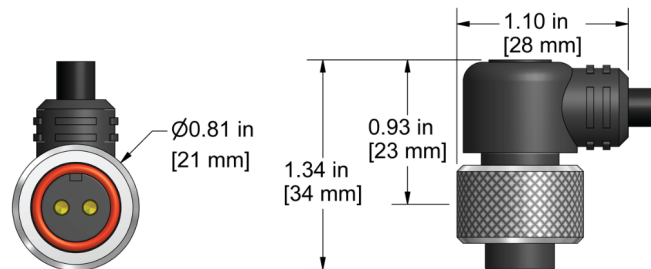

Specifications

Application	Permanent Mount
Max Temperature	392° F (200° C)
Connector Type	2 Socket MIL-Style PPS Right-Angle
Shell Material	Polyphenylene Sulfide (PPS) Molded
Connector Insert Material	Polyphenylene Sulfide (PPS)
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900