

A3U Series

3 Socket MIL-Style, Right Angle, Polyurethane Molded Connector,
Permanent or Portable Mount, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



Product Features

- ▶ 3 Socket Connection for use with CTC Top Exit, Dual Output & Negative Voltage Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

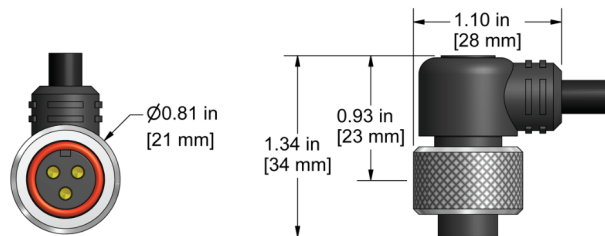

Specifications

Application	Permanent Mount
Max Temperature	250° F (121° C)
Connector Type	3 Socket MIL-Style Right-Angle
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP68
Pin-Out	A = Signal (+) CTC Red B = Common (-) CTC Black C = Signal (+) CTC White NOTE: Green NC

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900