

# J2C Series




VIBRATION ANALYSIS HARDWARE

2 Socket Mini-MIL Connector with Rubber Bending Strain Relief, for use with CTC Miniature Industrial 2 Pin Accelerometers, Polyurethane Molded, Portable Measurement, 250 °F (121 °C) Max Temp

## Product Features

- ▶ 2 Socket Mini-MIL Connection for use with CTC Miniature Size Accelerometers
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

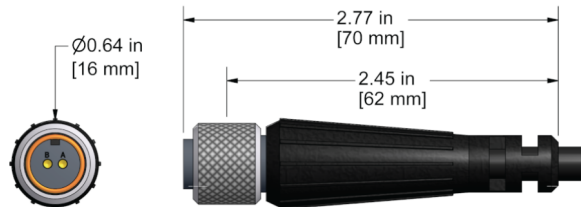

## Specifications

Application	Portable Measurements
Max Temperature	250° F (121° C)
Connector Type	2 Socket Mini-MIL
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900