

M2C Series




VIBRATION ANALYSIS HARDWARE

5 Socket M12, Polyurethane Molded Strain Relief Connector, with 2 Live Sockets, Portable Measurements, 250° F (121° C) Max Temp

Product Features

- ▶ 5 Socket M12 Connection with 2 Live Sockets, for use with CTC Single Axis, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

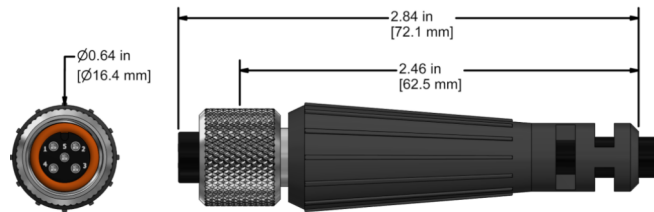

Specifications

Application	Portable Measurement
Max Temperature	250° F (121° C)
Connector Type	5 Socket M12 Connector
Strain Relief	Rubber Bending Strain Relief
Shell Material	Polyurethane Molded
Connector Insert Material	PolyCarbonate
Rating	IP68
Pin-Out	1 = Signal (+) 2 = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900