

# M3A Series

5 Socket M12, Polycarbonate Molded Connector, for use with 3 Conductor Cables, Permanent Mount, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



## Product Features

- ▶ 5 Socket M12 Connection with 3 Live Sockets, for use with CTC Dual Output, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

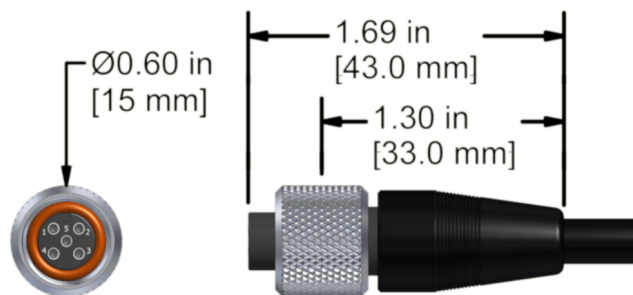

## Specifications

Application	Permanent Mount
Max Temperature	250° F (121° C)
Connector Type	5 Socket M12 Connector
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	1 = Signal (+) CTC Red 2 = Common (-) CTC Black 3 = Signal (+) CTC White

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900