

M4TA Series




VIBRATION ANALYSIS HARDWARE

4 Socket M12, Polycarbonate Molded Connector, Compatible with TA412-M12A and TA414-M12A, Permanent Mount, 250 °F (121 °C) Max Temp

Product Features

- ▶ 316L Stainless Steel Locking Ring
- ▶ IP66

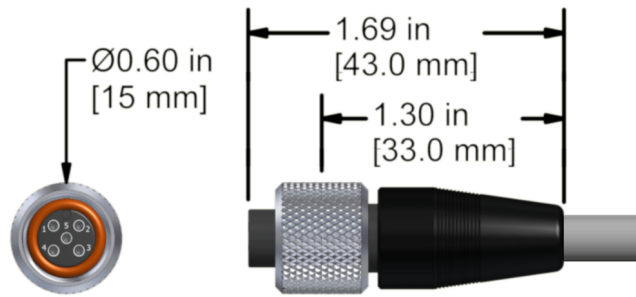

Specifications

Application	Permanent Measurement
Max Temperature	250 °F (121 °C) Max Temp
Connector Type	4 Socket M12 Connector
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	1 = Ch. Y (+) 2 = Common (-) 3 = Ch. Z (+) 4 = Ch. X (+)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900