

# OptiPEAK TDL600

## Moisture in Natural Gas Analyzer

The next-generation TDLAS analyzer for automatic online measurement of moisture in variable compositions of natural gas and biomethane. The OptiPEAK TDL600 Tuneable Diode Laser Analyzer employs the latest techniques in laser absorption spectroscopy and signal processing power to offer a robust high performance analyzer, designed specifically for the measurement of moisture in natural gas. This non-contact technology requires minimal maintenance, even in demanding applications such as changing methane concentrations or sour gas. The analyzer is fully hazardous area certified and delivers class-leading measurement performance, stability and detection sensitivity.



### Highlights

- D-MET system: Factory ready for varying gas compositions e.g. after stream blending, in shale gas or biomethane
- Operating range down to 1 ppm<sub>v</sub>
- Sour gas compatible
- Simple installation and setup
- Low maintenance
- ATEX, IECEx, UKCA and cQPSus certified
- Integrated sample handling
- Proven Michell Instruments quality: 40 years of expertise in moisture measurement built into the design

### Applications

- Natural gas glycol dehydration
- Natural gas transmission monitoring
- Custody transfer
- Natural gas storage
- Offshore export pipeline natural gas
- LNG receiving / re-gasification plants
- Vaporized NGL
- Biomethane
- Suitable for use with natural gas containing up to 20% hydrogen with no further modification required

## 40 Years of Experience with Moisture and Hydrocarbon Dew-Point Measurement in Natural Gas

The control of moisture and hydrocarbon dew point is critical for the operational safety and efficiency of the plant equipment in upstream through to downstream processes.

We at Michell Instruments have been developing expert moisture sensing instruments and systems for 40 years. Over this time, we have gained extensive knowledge of applications in natural gas with over 1000 analyzer installations in sites across the globe. Today Michell Instruments offers customers in the oil and gas industry a suite of complementary moisture and hydrocarbon dew-point analyzers and systems.

### The OptiPEAK Difference

#### Performance

- High accuracy with lower detection limit of <1 ppm<sub>v</sub>
- Range of 1 to 1000 ppm<sub>v</sub>

The OptiPEAK TDL600's lower detection limit (LDL) makes the instrument a class leader in single path TDLAS moisture analyzers currently commercially available.

The maintenance-free, simple dual pass cell offers reliable measurement results throughout its range. It combines sensitivity and robustness without the high top-end range limit which could make the analyzer likely to saturate quickly at higher moisture levels. This is sometimes the case with comparable, costly and difficult to maintain multi-pass (Herriot) cells. With its high accuracy, the analyzer is future proof and comfortably exceeds the requirements of the main international natural gas quality harmonization guidelines in Europe and United States.

#### Dynamic background gas compensation

- D-MET – active gas composition compensation for multi-source dynamic gas streams: shale gas and biomethane ready

Natural gas stream compositions can vary. In some applications it is difficult to use an older generation TDL instrument which can only be tuned to one defined gas composition. Michell Instruments' next generation TDL hygrometers overcome this limit. The OptiPEAK TDL600 utilizes the innovative D-MET System, dynamic background gas compensation. For the user, this means that the moisture measurement is virtually independent of changes in the methane level. No further manual correction factors are required.

*For more challenging sour gas (CO<sub>2</sub> content of >2.5 % and/or % H<sub>2</sub>S) applications, it is also possible to apply a special calibration to maintain analyzer performance. Please contact your Michell representative for more information.*

#### Reliability

- Signal drift reduction – built-in, continuous laser optimization

Tunable diode lasers can drift. This inherent property of diode lasers can lead to reduction in sensitivity and drift in measured readings. The OptiPEAK's built-in continuous laser optimization system ensures that the laser remains locked to the correct water absorption peak for the highest measurement integrity at all times.

- High-accuracy temperature control

For the optimal performance of any TDL hygrometer the temperature stability is of highest concern. The OptiPEAK series not only utilizes the highest quality laser with exceptional life span, but also has a sophisticated multi-stage control system to maintain the temperature of the laser to within tight limits.

#### Simplicity

- Human Machine Interface (HMI)

The TDL600 provides a highly intuitive, color, menu-driven interface, utilizing a capacitive touch pad. This allows operation and interrogation of the analyzer in the field with no need for a hot-works permit. Navigation is easy and there is no need for a stylus.

- Easy integration into existing control systems

The OptiPEAK TDL600 is equipped with 3 programmable 4...20 mA analog outputs and a digital output utilizing the widespread ModBus Protocol for easy connection to a SCADA or other user-defined data acquisition system.

- Integrated sampling system

The OptiPEAK series is supplied with a high quality, in-house designed, sample conditioning system that is optimized for the applications in natural gas as well as the high speed of response of the analyzer.

- Remote application software supplied as standard

Allows remote control and configuration of the analyzer to simplify operations on large, distributed locations.

#### Reduced cost of ownership

- Minimum installation and maintenance

With its integrated sampling system and small footprint, the OptiPEAK TDL600 can be easily retrofitted into existing plant infrastructure. Due to the inherent stability of the instrument, regular field calibration is not required under normal operating conditions. The analyzer will perform reliably for many years with just basic maintenance and housekeeping.

- Built-in self verification

The OptiPEAK TDL600's innovative self-verification and self-compensation system checks itself against calibration data on every update cycle, adjusting if necessary. This function is extremely useful after a system upset – there is no need for a lengthy setup procedure.



## Sample Conditioning Systems

A well designed sampling system is key to achieving correct measurement and reliable long-term operation of any natural gas moisture analyzer. The sample conditioning system of the OptiPEAK TDL600 applies state-of-the-art filtration and multi-stage pressure reduction to present a clean, wholly gaseous phase representative sample for continuous analysis. Systems that disregard the requirements for adequate sample conditioning will fail to achieve the levels of accuracy promised in the analyzer data sheet and also may be very costly for the user in the longer term.


Whilst the fast response speed of TDL based analyzers is an important advantage, it is also widely accepted that the quality of the sample conditioning system design and its finish determine the performance of the entire measuring system. This is particularly valid for measurement of trace water vapor in single or double digit ppm ranges where the adsorption and desorption of the water molecules from surfaces in the conditioning system has to be considered.

Michell Instruments has 40 years' experience of low moisture measurements in process applications. The OptiPEAK series of instruments is supplied with a high-quality sample conditioning system that is optimized for applications in natural gas, as well as the high speed of response of the analyzer.



Our products are also backed up by global service and support. With locations on six continents and 56 countries, Michell Instruments offers an extensive network of factory-trained application engineers ready to analyze your application and deliver the solution. This allows us to assure customer satisfaction throughout your product's lifetime.

If you can't find a product to fit your application, contact your local Michell Instruments office, or visit our website [www.ProcessSensing.com](http://www.ProcessSensing.com) – we're here to help.

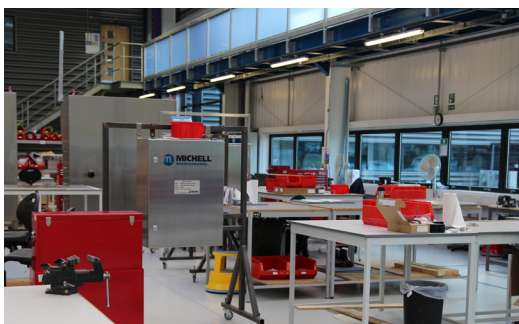

## The Moisture Specialists:

### We have the solution for your moisture sensing needs

With five proprietary moisture sensing technologies, Michell Instruments will tailor solutions to best fit the specifics of your application, as well as the project budget.

#### Relative Humidity Sensors:

Designed for a broad range of heavy industrial and process industries.

#### Ceramic Sensor Technology:

Third generation of metal oxide for natural gas applications at high pressure (CNG) and economical, easy gas processing applications.

#### Chilled Mirror:

For precise reference measurements at the highest accuracy and NPL or NIST traceability.

#### Quartz Crystal Microbalance:

For fast, precise measurement at low ranges in changing backgrounds.

#### TDLAS:

For fast, precise and low maintenance measurement in natural gas from 1000 ppm<sub>v</sub> down to 1 ppm<sub>v</sub>.

# Technical Specifications

<b>Measurement Technology</b>	Tunable Diode Laser Spectroscopy (TDLAS)
<b>Measurement Range</b>	1...1000 ppm <sub>v</sub>
<b>Accuracy *</b>	± 1 ppm <sub>v</sub> or ±3 % of reading, whichever is greater
<b>Repeatability *</b>	±0.5 ppm <sub>v</sub> or ±1.5 % of reading, whichever is greater
<b>Limit of Detection</b>	1 ppm <sub>v</sub>
<b>Available Units</b>	ppm <sub>v</sub> , lb/MMSCF, mg/Nm <sup>3</sup> , dew point °C or °F (ISO 18453 or IGT#8)
<b>Response Speed</b>	Display update 2...3 s
<b>Environmental Conditions</b>	
<b>Indoor version:</b>	+10...+45 °C (+50...+113 °F)
<b>Outdoor version*:</b>	-20...+45 °C (-4...+113 °F)
<b>Outdoor with cooling option*:</b>	-20...+55 °C (-4...+131 °F)
<b>Electrical Specifications</b>	
<b>Supply Voltage</b>	110 V AC or 230 V AC 50/60Hz
<b>Power Requirements</b>	
<b>Indoor system:</b>	80 W
<b>Outdoor system:</b>	180 W
<b>Analog Signals</b>	
<b>Input:</b>	2 x 4...20 mA user configurable
<b>Output:</b>	3 x 4...20 mA, 3 alarms 250 V AC, 3 A (volt-free contacts)
<b>Digital Communications</b>	RS485 ModBus RTU
<b>Data Logging</b>	Logs all process variables with a user selectable sample period in the range of 10s to 1 day
<b>Local Interface</b>	4.3" color LCD with touch-pad operation
<b>Electrical Connections</b>	3 x M20 entries for cable glands


<b>Calibration</b>	
<b>Factory Method</b>	3 point, traceable to NPL and NIST
<b>Recommended Calibration</b>	None required, dependant on user or quality system requirements
<b>Physical Specifications</b>	
<b>Sample Flow Rate</b>	0.5 NI/min cell sample 1...5 NI/min sample filter by-pass
<b>Inlet Pressure</b>	Maximum 100 barg (1450 psig)
<b>Outlet Pressure</b>	Cell vent 0.7...1.4 bara (10...20.3 psia) Filter by-pass maximum 3 barg
<b>Enclosure Type/ Packaging</b>	Aluminum alloy, explosion proof, polyester coated, IP66, NEMA 4
<b>Gas Connections</b>	1/4" NPT (F)
<b>Weight</b>	40...75 kg (88...165 lbs) (approximate – depending on configuration)
<b>Sample System Enclosure</b>	304L or 316L stainless steel
<b>Hazardous Area</b>	
<b>ATEX/UKCA:</b>	II 2 G Ex db ib op is IIC T5 Gb
<b>IECEX:</b>	Ex db ib op is IIC T5 Gb Tamb -20 °C...+60 °C
<b>cQSus:</b>	Class I, Division 1, Groups A, B, C, D, T5, Tamb -20 °C...+60 °C
<b>Additional Approvals</b>	TRCU 012 (EAC), PESO (India), NEPSI (China), Ukraine Ex, Kazakhstan Pattern Approval (GOST-K)

\*If installed outside, the analyzer must be shaded from direct sunlight to prevent heating effects through sun radiation

## Sampling Conditioning Systems


### Indoor Version

OptiPEAK TDL600 with sampling system on panel mounting

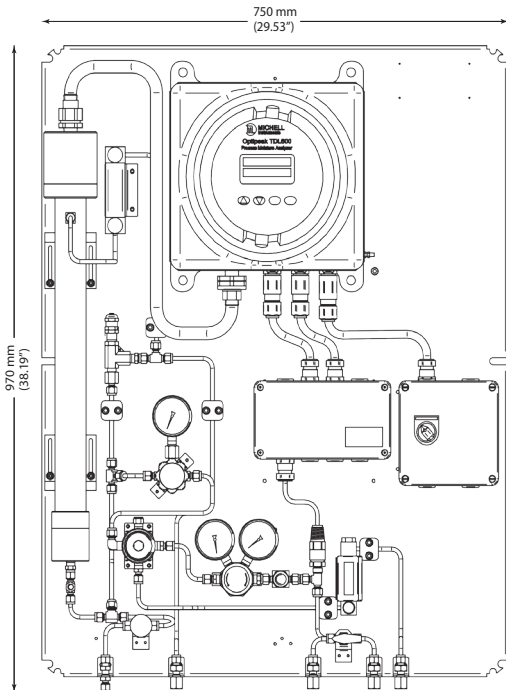

### Outdoor Version

OptiPEAK TDL600 and sampling system with enclosure, including heater

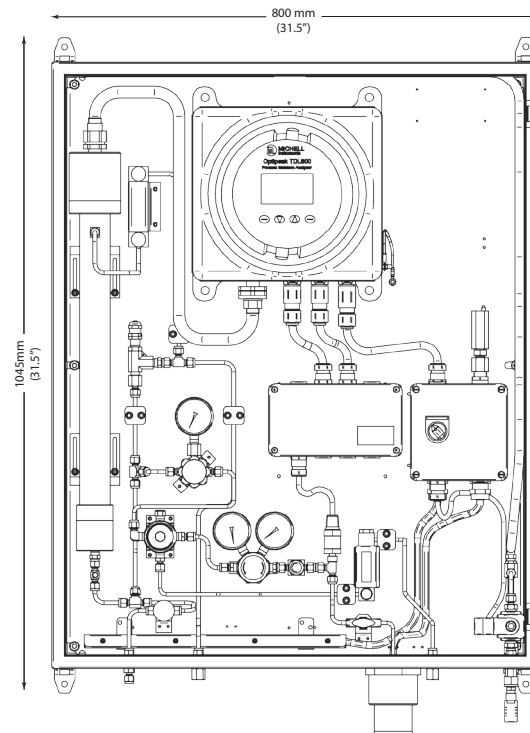

Micell Instruments adopts a continuous development programme which sometimes necessitates specification changes without notice.  
Issue no: OptiPEAK TDL600\_97470\_V6.1\_EN\_Datasheet\_0823