

- Compatible with Silicon Designs accelerometers
- No additional accelerometer power supply needed
- Automatic and manual calibration routine
  - +/-1G Flip or manually enter from calibration certificate
- Adjustable filters and FFT for data analysis in both real time or post collection
- Three input channels support three 1- axis modules or one 3- axis module
- 16 Bit sample rates from 1 to 10,000 samples/second per axis
- Recording feature with playback in multiple speeds
- Available preconfigured if purchased with a new Silicon Designs accelerometer module
- Automatic setup in less than 5 minutes includes bias, scale factor, etc.
- Last configuration stored in memory and available remotely
- Included software features familiar and convenient user interface built using a LabView platform



## SPECIFICATIONS

### PHYSICAL

Case Size	5.5" x 4.25" x 1.5"
Weight	275 grams / 9.5 oz.
Case Material	Die Cast Aluminum, Plastic

### ENVIRONMENTAL

Operating Temperature	0°C to +55°C (max)
Storage Temperature	-40°C to +85°C (max)
Humidity	0% - 90% Non-condensing

### OPERATIONAL

Connection	25 Pin Female D-Sub
USB Connection	Micro USB (B)
Memory Type	SD Card, Micro SD w/ Adaptor
Max SD Card Size	32 GB

### PC REQUIREMENTS

Operating Systems	Windows 10, 8, 7, XP
Host Connection	USB2 Type A
Power Supply	Via USB Cable
Max Power Consumption	750 mW
TCP/IP Remote Operation	Network Connection Req.

## ZERO (DC) TO MEDIUM FREQUENCY APPLICATIONS




## ADDITIONAL FEATURES

- Real time data monitoring
- Collect data in G or volts
- Display shows from 100ms to 2 minutes of data
- FFT (Fast Fourier Transform) analysis is an advanced feature usually found on much more expensive DAQ systems
- Independent scale G/Div settings expand or shrink each channel's input for better visibility
- collection
- PAUSE, RWD, FWD without interrupting data
- Optional offsets provide a staggered display for no overlap
- Independent scale G/Div per channel
- Oscilloscope (Sweep, Scope, Strip) and Volt Meter modes
- Hide or show any or all of the 3 channels
- View data from remote locations on network via TCP/IP
- Optional offset setting per channel
- Export time-stamped data to Excel, MatLab etc.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


## DATA COLLECTION

Data can be collected live or recorded for playback later. Modifying the horizontal scale expands or contracts the period of time displayed on the screen from 100ms up to 2 minutes. Each axis is one channel, and these can be hidden or offset (but will still be recorded) as desired.

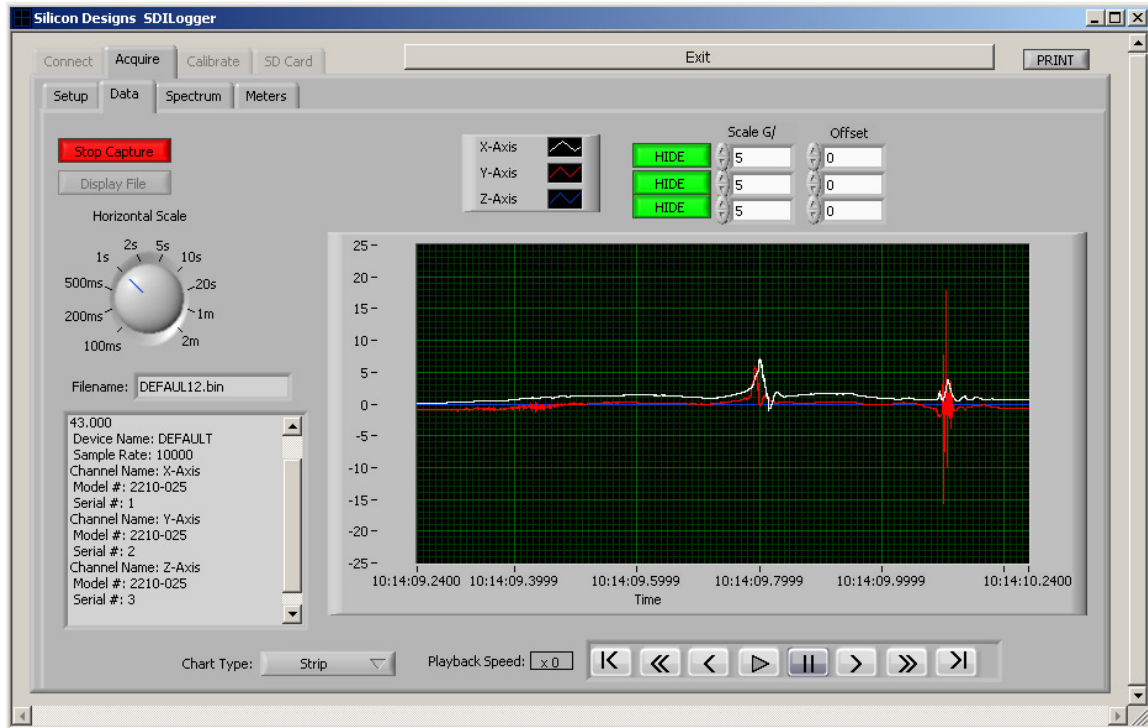

## SPECTRUM (FFT)


SPECTRUM displays the FFT of the data. This is a more advanced feature of the G-logger 3330. You can analyze the data to see at which frequencies the maximum vibrations are occurring.

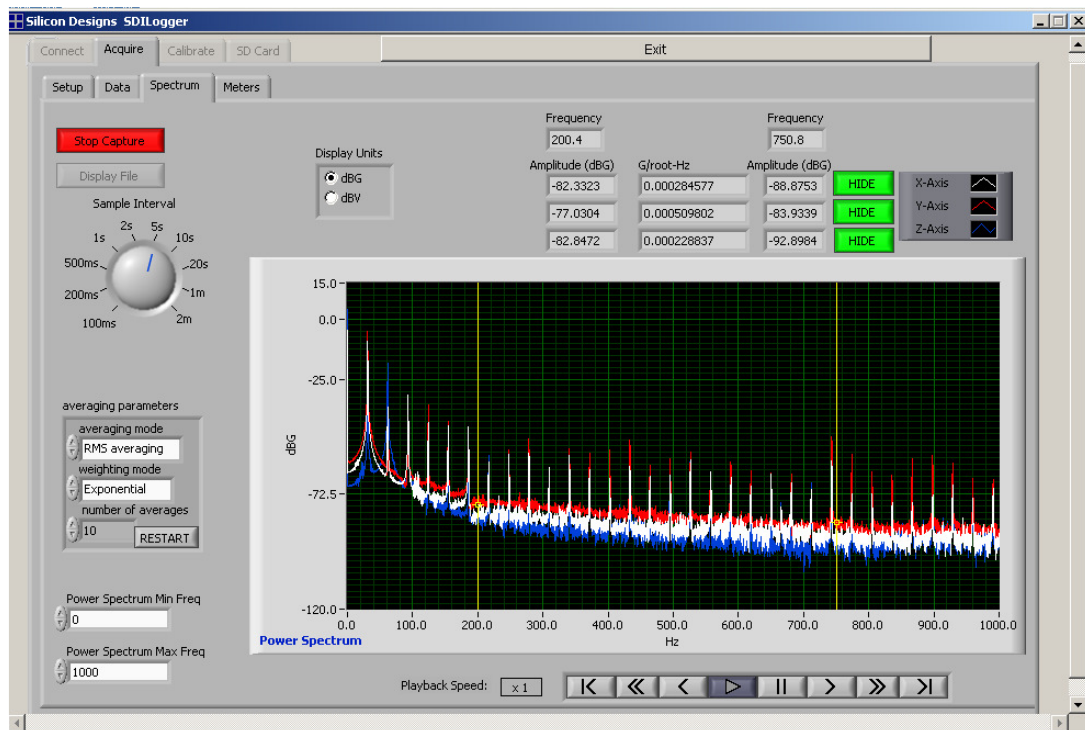

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


## PEAK VALUES

The METERS screen provides DC, RMS, and peak values in either Volts or Gs. These values are calculated over the time interval selected by the horizontal scale selected on the Data tab. The values are updated at that same interval as well.

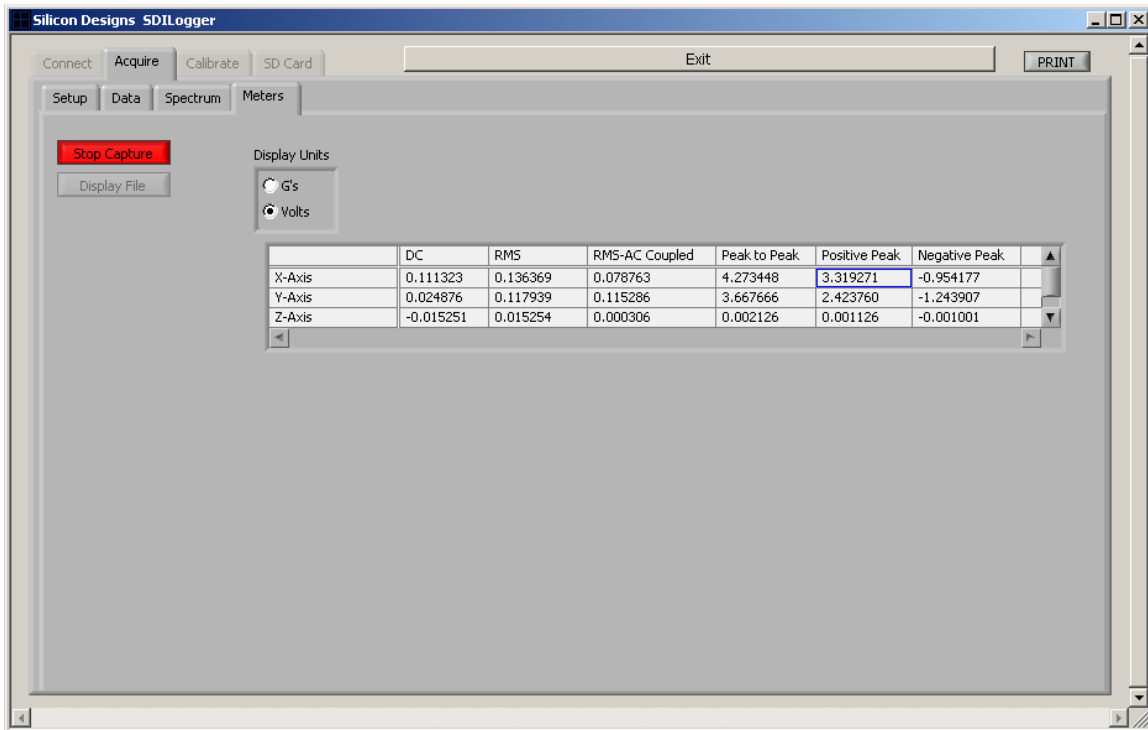

## CALIBRATE

The default calibration parameters are supplied automatically, or unit-specific calibration parameters can be manually entered. Manual calibration can be done any time using gravity and performing a simple +/-1G flip.



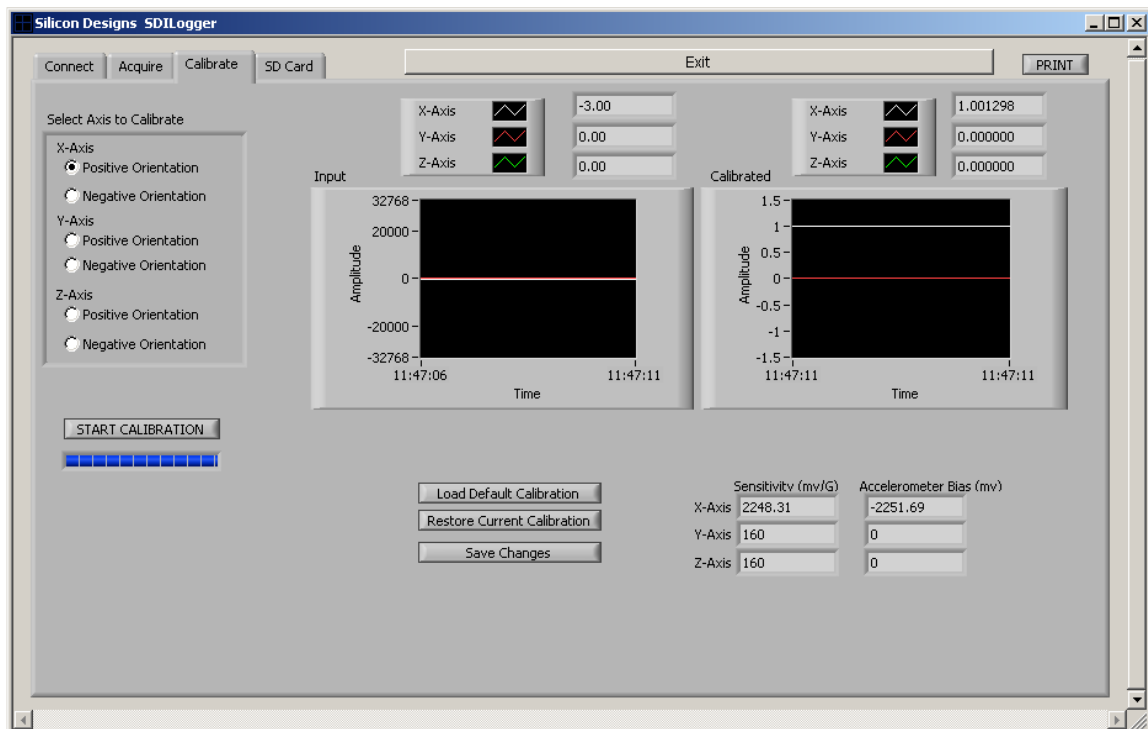


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

## CONNECTOR PIN LAYOUT

TOP ROW PIN NUMBERS												
1	2	3	4	5	6	7	8	9	10	11	12	13
CH 0 0 Volt	CH 0 AON	CH 1 0 Volt	CH 1 AON	CH 2 0 Volt	CH 2 AON	X	X	X	X	X	X	X
Bottom Row Pin Numbers												
14	15	16	17	18	19	20	21	22	23	24	25	
CH 0 AOP	CH 0 8-32 V	CH 1 AOP	CH 1 8-32 V	CH 2 AOP	CH 2 8-32 V	X	X	X	X	X	X	

Included 25 Pin D-Sub  
Connector for Accelerometer  
Connection



## CABLE WIRING

### RECOMMENDED ELECTRICAL CONNECTIONS (DIFFERENTIAL MODE)

#4 SCREW OR M3 SCREW  
TORQUE: 4.9 IN-LBS / 6.2 CM-KG

**1-AXIS SDI ACCELEROMETERS**

### 3-AXIS SDI ACCELEROMETERS RECOMMENDED ELECTRICAL CONNECTIONS (DIFFERENTIAL MODE)

#4 SCREW  
M3 SCREW  
TORQUE:  
4.9 IN-LBS  
OR 6.2 CM-KG

**3-AXIS SDI ACCELEROMETERS**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE